

Hybrid Flex Inverter Submittal Data

ARU9RLF

Slim Duct



Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____



Approval: _____ Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____
 Reference: _____

Power	V/Hz/P	230/60/1
Fan type		Sirocco
No. Motors	(W)	2 (81)
CFM [1.10 in.WG]	(Hi,Me,Lo,Qu)	353/324/294/265
Sound Pressure Level	db (Hi,Me,Lo,Qu)	28/27/26/25
F.L.A.	(A)	.32
Refrigerant		410A
O.D. Discharge	in (mm)	Ø1/4" (6.35)
O.D. Suction	in (mm)	Ø3/8" (9.52)
Dimensions		H x W x D
Uncrated	(in)	7-25/32 x 27-9/16 x 24-13/32
	(mm)	(198 x 700 x 620)
Crated	(in)	10-7/8 x 38-1/8 x 29-3/4
	(mm)	(276 x 968 x 756)
Weight		
Net	lbs. (kg)	41 (19)
Gross Shipping	lbs. (kg)	55 (25)

Cooling Capacity	(BTU/h)	9,000
Moisture Removal	pt/h (l/h)	2.7 (1.3)
Heating Capacity	(BTU/h)	10,200
Temperature Setting Range		
Cooling	°F(°C)	64~90 (18~32)
Heating	°F(°C)	60~88 (16~31)
Drain Pipe Size**	OD in	Ø1-1/16
	ID in	Ø3/4
Remote Control Type		Wired
Electrical Connection*	AWG	14/3 with ground

*Power and communication are fed from the outdoor unit.

**Adapter to 3/4" PVC included with unit.

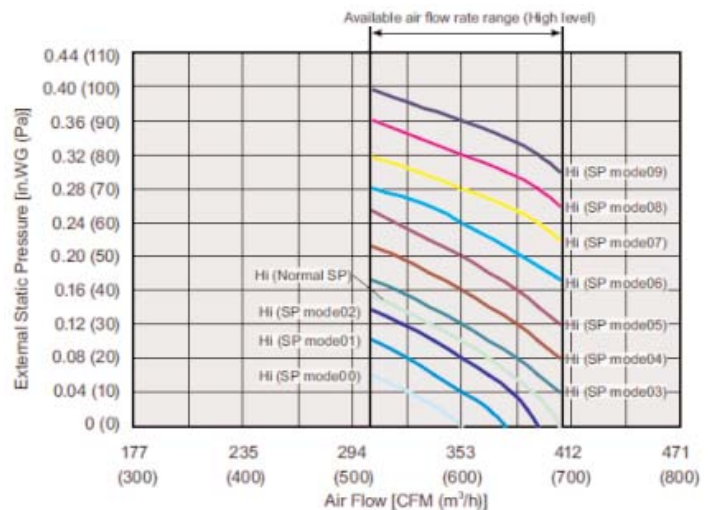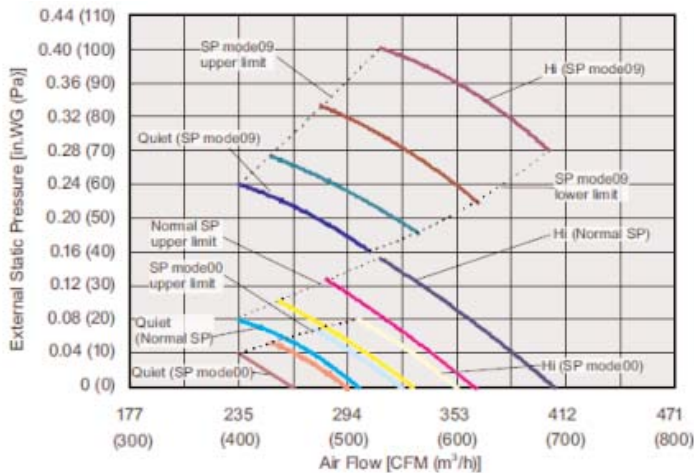

Note:
 Specifications are based on the following conditions.
 Power source of specifications : 230V
 Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.
 Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.
 Standard Static Pressure: 0.10in.WG (25Pa)
 Pipe length : 16.4ft. (5m) [Outdoor unit - Branch box], 9.8ft. (3m) [Branch box - Indoor unit]
 Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]

Fujitsu General America, Inc.
 Fairfield, NJ 07004
 Toll Free: 1-888-888-3424
 Fax: (973) 836-0447
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.