

Submittal Data: ASU18RLF




Job Name: _____ Location: _____
Purchaser: _____
Engineer: _____
Submitted To: _____ For: Reference Approval Construction
Submitted By: _____
Unit Designation: _____ Schedule No. _____ Model No.: _____

Capacities:

Cooling	18,000 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	20,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	
Ducted	9.3
Non-Ducted	9.8
Mixed	9.5
SEER	
Ducted	14.7
Non-Ducted	17.0
Mixed	15.8
EER <i>Cooling</i>	
Ducted	8.7
Non-Ducted	9.25
Mixed	8.97
Voltage/Frequency/Phase	208-230/60/1
Indoor Unit:	
Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	43/37/33/31
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	44/37/33/31
Weight	31 lbs.
Refrigerant Piping:*	
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

OUTLINE AND DIMENSIONS

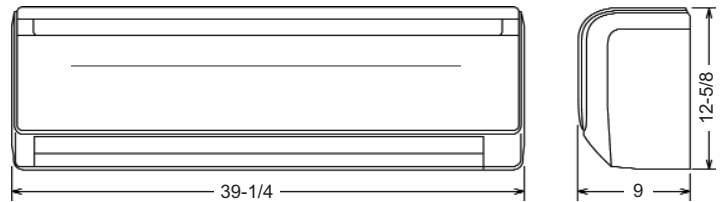

Standard Features:

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: Up/Down
- ◆ Apple Catechin / Ion Deodorizing Filters
- ◆ Sleep Timer
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Quiet Mode
- ◆ Dry mode
- ◆ Refrigerant R410A

Notes:

*Piping lengths vary by outdoor unit. See outdoor unit submittal sheet for detailed specifications.

